SELECON

PRODUCT SPECIFICATION

1200

COMPACT FRESNEL

An industry standard 1.0/1.2kW Fresnel with a 150mm lens.

The adjustable cone of light has a soft edge, easily blended with adjacent beams to provide even illumination.

The Compact Fresnel offers efficiency, strength and performance.

Discontinued Product

FEATURES

- A wide range of beam angles from 7°-50°.
- Industry standard 150mm lens.
- Adjustable yoke balance point.
- 'Swing-down' door for easy access to lamp or cleaning. Disconnects the mains power supply on opening.
- Smooth 'posi-slide' focus system, no metal to metal contact.
- Constructed of pressure die-castings and aluminium extrusion.
- Fully tested and compliant to CE standards.

PHYSICAL DATA

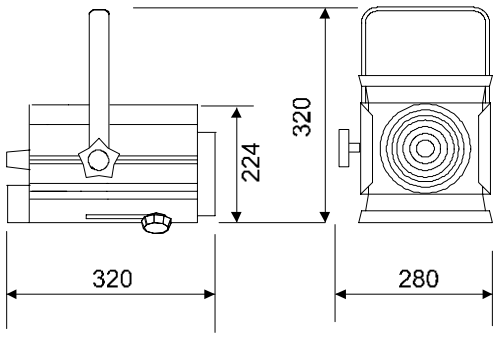

Weight:	4.6 Kg
Packed Weight:	6.1Kg
Carton Size:	275 x 250 x 380
Carton Size Cubic:	0.026
Colour Frame Size:	185mm x 185mm
Included:	1 x colour frame, 1 x M12 nut & bolt set, instruction leaflet.

PHOTOMETRIC DATA

1200 Compact Fresnel

Beam diameter in metres									
Beam angle	7°	0	0.24	0.49	0.73	0.98	1.22	1.47	1.71	1.96
	50°	0	1.87	3.73	5.60	7.46	9.33	11.19	13.06	14.92
Throw distance in metres		0	2	4	6	8	10	12	14	16

Light Output in Lux

Lamp									
240V T/29 1200w	Spot	41400	10350	4600	2588	1656	1150	845	647
	Flood	4000	1000	444	-	-	-	-	-

Tests conducted using a standard T29, 1200W, 240V, 27,600 lumens lamp.

LAMPS: 220-240V

	1200W	
T/29	27,600 lumens	480 hours average life
CP90	30,000 lumens	400 hours average life
	1000W	
T/11 T/19	21,500 lumens	900 hours average life
CP70	25,000 lumens	400 hours average life

ACCESSORIES ORDER CODES

Barndoor	20BDSF10
Lens Safety Mesh	20SM6
Suspension Hookclamp	20HC
Safety Bond	20SC

Selecon reserves the right to change the specifications without notice (04/06)

SELECON, THE ONLY LUMINAIRE MANUFACTURER TO OFFER A LIMITED THREE YEAR WARRANTY ON ENTERTAINMENT PRODUCTS:
www.seleconlight.com/english/support/warranty.html

© 2005 Selecon New Zealand Limited. All Rights Reserved.